


TECHNICAL DATASHEET

COMPRESSION SPRAYER WITH FPM / EPDM GASKETS

“VT3” – “VT3E”



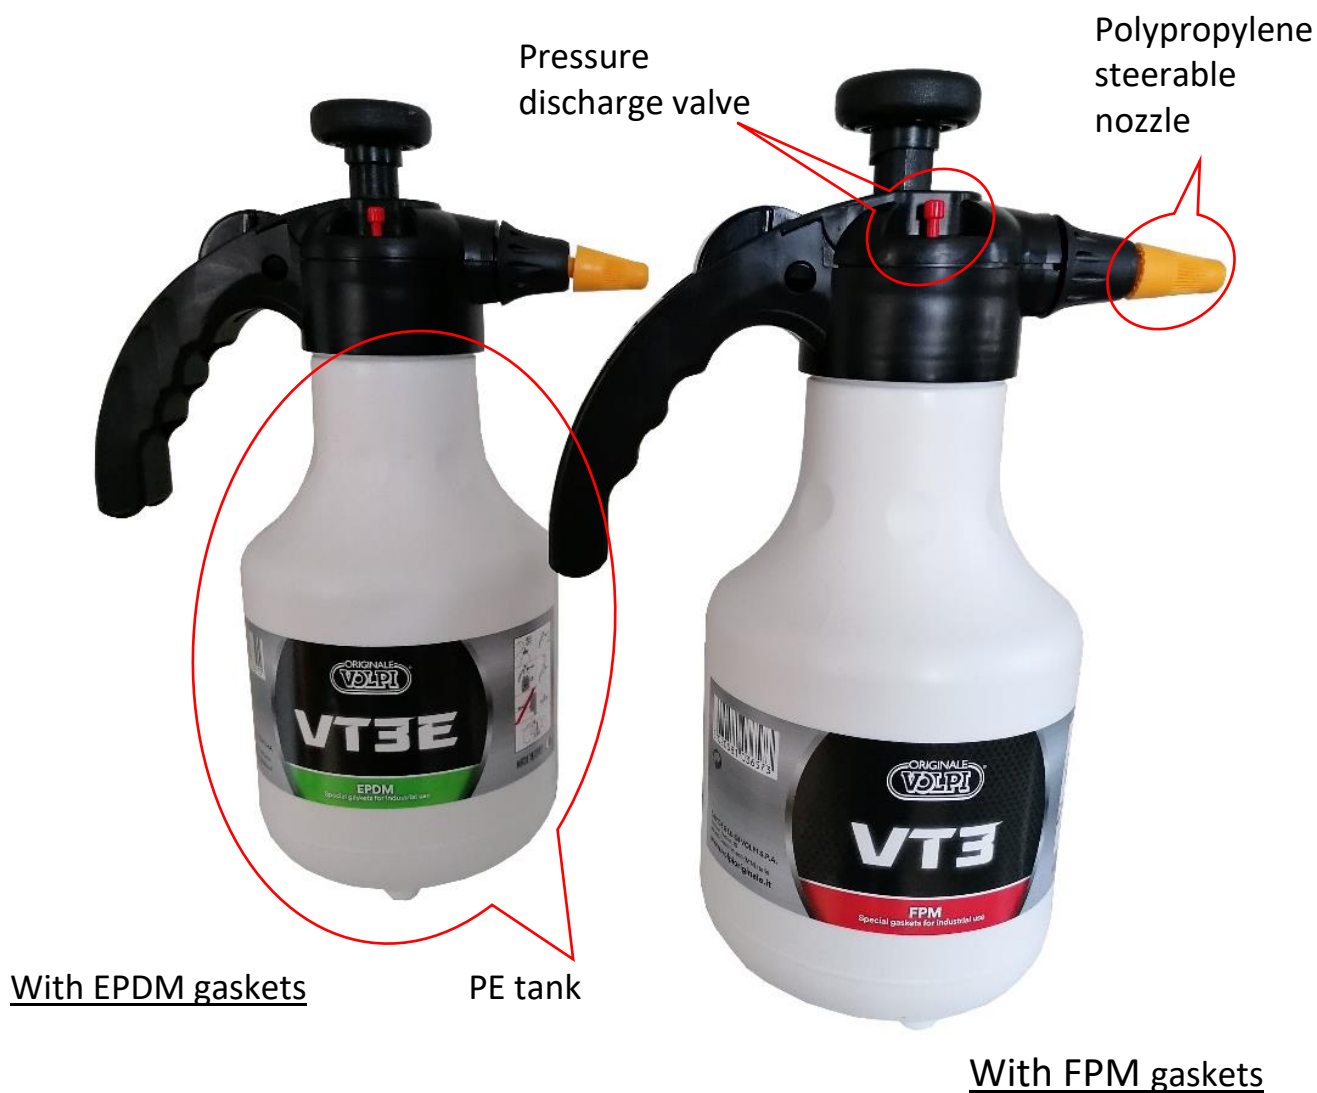

COMPRESSION SPRAYER WITH FPM / EPDM GASKETS

TANK MATERIAL	PE
HEAD MATERIAL	POLYPROPYLENE
GASKETS MATERIAL	FPM (VT3) – EPDM (VT3E)
NOZZLE MATERIAL	POLYPROPYLENE
PIN MATERIAL	PVDF
SPRING MATERIAL	INOX AISI 302
NOZZLE	STEERABLE AND ADJUSTABLE
TANK CAPACITY	2 LT
WORKING PRESSURE	2 BAR
FILLING DIAMETER	60 mm
NET WEIGHT	0,40 Kg
PACKAGING DIMENSIONS	38 x 32 x 48
PCS PER PACK	10

PRESSURE BAR	FLOW RATE LT/MIN	NOZZLE (HOLE 1,25)
1,0	0,22	60°
1,5	0,29	
2,0	0,37	
1,0	0,46	JET
1,5	0,61	
2,0	0,77	

VT3

Hydrochloric acid 20%
Ethyl alcohol
Bleach
Cleaners
Diesel fuel
Fuel oils
Hydraulic oils (petroleum based)
Synthetic oils
Caustic soda
Amuchina

VT3E

Hydrochloric acid 20%
Ethyl alcohol
Bleach
Cleaners
Acetone
Ammoniac 10%
Hydraulic oils
Caustic soda
Amuchina

CLEANING: wash the tank after every use with clean water.